

# Model RF150 | Model RF250 Label Applicator



## Features

- Shrink sleeve labels applied to round, oval, square, rectangular, and irregularly shaped containers
- Speeds up to 150 or 250 containers per minute
- Shrink sleeve labels applied to either empty or filled containers made of glass, plastic, metal, or paperboard
- Compact design minimizes footprint
- Quick “no-tools” adjustment for fast and easy product changeovers
- Color touch screen operator interface with recipe storage for container and sleeve material combinations
- For use with PVC, PET/PETG, OPS, or PLA material from 40 to 70 microns thick

# Graham Model RF150 | Model RF250 Shrink Sleeve Label Applicator



The Accraply Shrink Sleeve Model RF150 and Model RF250 are compact, operator friendly and easy to maintain shrink sleeve applicators that can be used to apply full body or tamper evident bands to a variety of container shapes and sizes. Shrinkable material is cut to length and synchronously applied at conveyor speeds for the best possible material-to-container placement accuracy.

## Applications



Oval, round and square containers made of plastic, glass or metal can be handled at speeds up to 150 (Model RF150) or 250 (Model RF250) per minute. Sleeve materials made from PVC, PET/PETG, OPS, or PLA can be run at thicknesses between 40 to 70 microns. Containers can be run full or empty through our shrink sleeve label application systems.

The color touch screen allows operators to access machine functions and to store recipe settings for container and sleeve material combinations. These machine settings can be quickly and easily retrieved for fast changeover.

## Options

The Accraply Model RF150 and Model RF250 can be incorporated into customer's existing conveyor or can be supplied with an integrated, factory designed conveying system. Accraply's shrink sleeve label applicators include a number of performance enhancing options such as; vertical or horizontal perforators, product spacing and positioning systems, dual unwind/splice tables for 'non-stop' roll changes, missing sleeve and splice detection units and sleeve positioning systems.

Accraply also offers a full range of shrink tunnels including steam (zoned & non-zoned), hot air, and radiant heat tunnels.

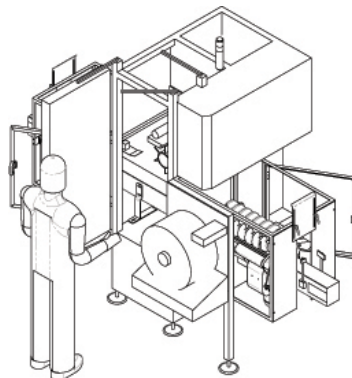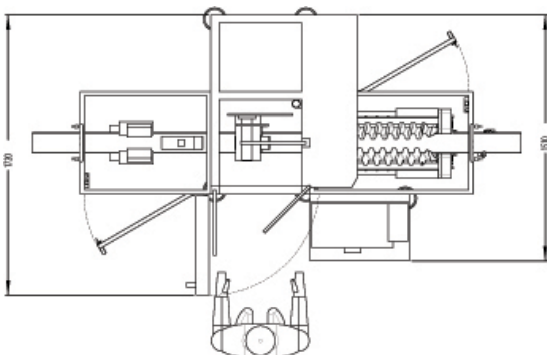

Application Rate	Up to 150 or 250 cpm (Dependant upon sleeve length)
Cut Material Lengths	25 mm - 150 mm
Electrical	240 V, 3-Phase, 30 Amp
Air	80 - 120 PSI 0.025 m <sup>3</sup> /min (1 ft <sup>3</sup> /min) clean filtered air
Weight	400 kg (880 lbs)
Product Capacity	Diameter: 25 mm - 105 mm Height: 20 mm - 250 mm
Material Type	PVC, PET/PETG, OPS, PLA
Material Thickness	40 - 70 microns
Full Spool Outside Diameter	500 mm
Core Size	127 mm

*All specification and tooling requirements are subject to Accraply evaluation of all label and product samples.*

*Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.*



## Accraply

Hall Works, Church Road  
Brightlingsea, Essex, CO7 0RZ, U.K.

t. +44 (0) 1206 304 982  
accraply.com

## barrywehmiller

F7/13-15 Forrester St, Kingsgrove NSW 2208  
www.barry-wehmiller.com.au

p. +61 (0) 2 9150 7055  
e. sales@barry-wehmiller.com.au

