

Model VF350 Shrink Sleeve Label Applicator



Features

- Shrink sleeve labels applied to round, oval or square containers
- Shrink sleeve labels applied to either empty or filled containers made of glass, plastic, metal, or paperboard
- Quick “no-tools” adjustment for fast and easy product changeovers
- Speeds up to 350 containers per minute
- Compact design minimizes footprint
- Color touch screen operator interface with recipe storage for container and sleeve material combinations
- For use with PVC, PET/PETG, OPS or PLA material from 40 to 70 microns thick

Graham Model VF350 Shrink Sleeve Label Applicator



The Accraply Shrink Sleeve Model VF350 is a vertically fed shrink sleeve label applicator designed for containers that are filled or empty; round, square, or oval; in glass, plastic, or metal. Sleeve materials made from PVC, PET/PETG, OPS, or PLA material can be run at thicknesses between 40 and 70 microns and applied to multi-shaped containers at speeds of up to 350 per minute, dependent upon the length of material to be applied.


The Model VF350 incorporates a patented fully-adjustable cutter assembly with low cost disposable blades that adjust from 30 mm up to 170 mm diameter, significantly reducing changeover time. It will accommodate material cut lengths from 30 mm to 300 mm with container diameters of 28 mm to 168 mm and container heights up to 400 mm.

Options

This system can be incorporated onto customer's existing conveyor or can be supplied with an integrated, factory-designed conveying system. Accraply's shrink sleeve label applicators include a number of performance enhancing options such as; vertical or horizontal perforators, product spacing and positioning systems, dual unwind/splice tables for 'non-stop' roll changes, missing sleeve and splice detection units and sleeve positioning systems.

Accraply also offers a full range of shrink tunnels including steam (zoned & non-zoned), hot air, and radiant heat tunnels.

Application Rate	Up to 350 cpm (Dependant upon sleeve length)
Cut Material Lengths	30 mm - 300 mm
Electrical	230 V, 3-Phase, 30 Amp
Air	Not required on basic machine
Weight	270 kg (595 lbs)
Product Capacity	Diameter: 28 mm - 170 mm Height: 30 mm - 400 mm
Material Type	PVC, PET/PETG, OPS, PLA
Material Thickness	40 - 70 microns
Full Spool Outside Diameter	500 mm
Core Size	Adjustable for Metric and Imperial sizes
Standard Conveyor Heights	870 mm - 960 mm

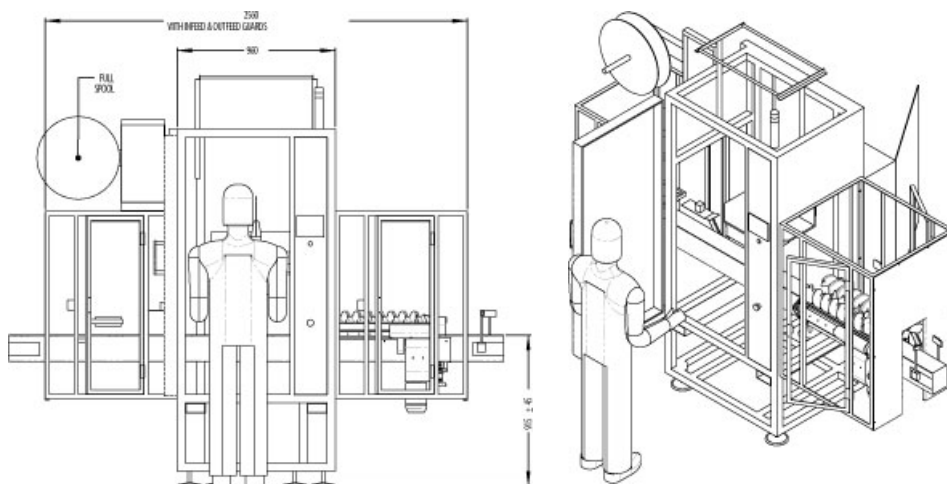

All specification and tooling requirements are subject to Accraply evaluation of all label and product samples.

Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.

