

Model VF650 Shrink Sleeve Label Applicator



Vacuum Forming Box



Features

- Shrink sleeve labels applied to round, oval or square containers
- Speeds up to 650 containers per minute
- Shrink sleeve labels applied to either empty or filled containers made of glass, plastic, metal, or paperboard
- Compact design minimizes footprint
- Quick “no-tools” adjustment for fast and easy product changeovers
- Color touch screen operator interface with recipe storage for container and sleeve material combinations
- For use with PVC, PET/PETG, OPS, or PLA material from 40 to 70 microns thick

Graham Model VF650 Shrink Sleeve Label Applicator



The Accraply Shrink Sleeve Model VF650 is a vertical shrink sleeve label application system designed for the heavy duty operations required by high volume producers. The small footprint, simple operator interface, and minimal machine maintenance makes the Model VF650 one of the most cost effective machines on the market.



This shrink sleeve label applicator features sophisticated controls for the cutting carriage and servo motors, which ensure repeatable cut length and material placement accuracy at high speeds. Sleeve materials made from PVC, PET/PETG, OPS, or PLA material can be run at thicknesses between 40 and 70 microns and applied to multi-shaped containers at speeds of up to 650 per minute, dependent upon the length of material to be applied.

The color touch screen automatically sets machine and ancillary module speeds, minimizing downtime for "no-tools" product changeover. Additionally, a patented fully-adjustable cutter assembly means that the only change part on the Model VF650 is the product mandrel.

Options

This system can be incorporated into customer's existing conveyor or can be supplied with an integrated, factory-designed conveying system. Accraply's shrink sleeve label applicators include a number of performance enhancing options such as; vertical or horizontal perforators, product spacing and positioning systems, dual unwind/splice tables for 'non-stop' roll changes, missing sleeve and splice detection units and sleeve positioning systems.

Accraply also offers a full range of shrink tunnels including steam (zoned & non-zoned), hot air, and radiant heat tunnels.

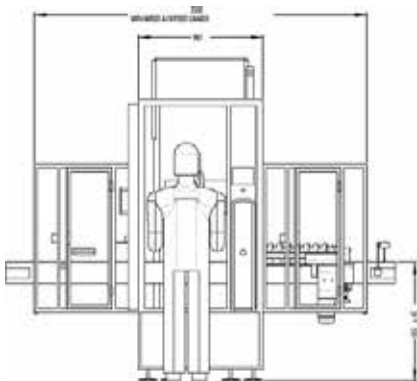

Application Rate	Up to 650 cpm (Dependant upon sleeve length)
Cut Material Lengths	30 mm - 300 mm
Electrical	240 V, 3-Phase, 30 Amp
Air	Not required on basic machine
Weight	575 kg (1260 lbs)
Product Capacity	Diameter: 28 mm - 170 mm Height: 30 mm - 400 mm
Material Type	PVC, PET/PETG, OPS, PLA
Material Thickness	40 - 70 microns
Full Spool Outside Diameter	600 mm
Core Size	127 mm
Standard Conveyor Heights	870 mm - 960 mm

All specification and tooling requirements are subject to Accraply evaluation of all label and product samples.

Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.



Accraply

Hall Works, Church Road
Brightlingsea, Essex, CO7 0RZ, U.K.

t. +44 (0) 1206 304 982
accraply.com

barrywehmiller

F7/13-15 Forrester St, Kingsgrove NSW 2208
www.barry-wehmiller.com.au

p. +61 (0) 2 9150 7055
e. sales@barry-wehmiller.com.au

