

TISMA Compact Horizontal Cartoner - HZ-100



Features

- Easy carton magazine loading
- · Accessible product loading area
- Segregation of production and drive slides
- Clean design under product loading area

- Versatile servo drive continuous or intermittent motion
- Up to 440 cartons per minute
- · Welded stainless steel frame

TISMA Compact Horizontal Cartoner - HZ-100


Standard Features

- · Continuous or intermittent motion
- Servo driven
- Allen-Bradley Logix Series PLC
- Straight or reverse tuck
- Scaled adjustments
- Precision milled carton packets
- · Gear-driven rotary carton placer
- · Powered carton magazine
- · Pneumatic loader

Optional Features

- Flexo-Tray® article buckets
- Continuous motion/pusher barrel cam
- Extended carton magazines
- Hot melt glue carton closing
- Adjustable carton pockets
- Pendant HMI
- Robotic infeeds
- Bottle loaders
- · Custom product infeeds
- · Scanner, labeler, friction feeder integratio

Specifications	
Production Speed	
Up to 440 cartons	
Carton Size Range	
Length	½" to 6" (13 mm to 152 mm)
Width	½" to 6 ½" (13 mm to 165 mm)
Depth	2" to 8" (51 mm to 203 mm)
Drive	
Single axis servo	
Infeeds	
Wide range of infeeds available for product orientation	
Carton Magazine	
4' (914 mm) Horizontal Standard	
Carton Set-Up	
2 or 4-Head Rotary Placer	
Flap Closure	
Glue or Tuck	
Electrical Control	
Allen-Bradley Logix Series PLC	
Finish	
Paint standard; stainless steel available	
Installation Requirements	
Power	One drop (specify voltage)
Air	One drop 60-80 PSI

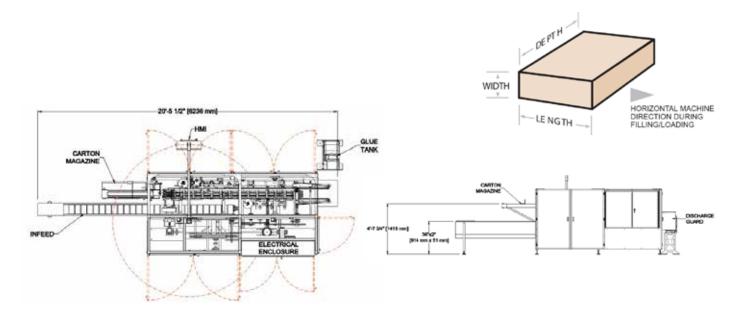

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.

